



FW760 SHING RAY

星銳牌工業用縫紉機

SHING RAY BRAND INDUSTRIAL SEWING MACHINE

New Development
專利產品·仿冒必究




高速平臺式綑縫機

NEEDLES HIGH SPEED CYLINDER BED DOUBLE CHAINSTITCH MACHINE

※APPLICATION:


※適用於各式大小鬆緊帶、泳裝、韻律裝。

Applicable to hemming elastic bands on swimming suits and aerobic suit.



※適用於各式壓條、男內褲。

Attached with tape folder on presser foot to covering seams on men underpants



※SPECIFICATION:

專用機種	用途	針數	針距(mm)						線數 支	針腳長 (mm)	差動比	抬壓 腳量 (mm)	最高轉數 (R.P.M)
			2.4	3.2	4.0	4.8	5.6	6.0					
FW760	下擺折邊用	2	-	-	○	○	-	-	4	1.2~4.4	0.5~1.0	6.3	6,000
		3	-	-	-	-	◎	-	5			5	
FW760	蓋縫用	2	-	-	○	○	○	-	4	1.2~4.4	0.5~1.3	6.3	6,000
		3	-	-	-	○	◎	-	5			5	
FW760	基本縫	2	-	○	○	-	-	-	4	1.2~4.4	0.5~1.3	5	6,000
		3	-	-	-	○	◎	-	5			5	
FW760-	上口袋用雙針 鏈式上飾縫	2	-	-	-	-	-	◎	4	1.2~3.3	0.5~1.3	7	5,000
FW760-Q	上滾條用	2	○	○	○	○	○	-	4	1.2~4.4	0.5~1.3	6.3	6,000
		3	-	-	-	○	◎	-	5			5	
FW760-FR	右切刀	3	-	-	-	○	◎	-	5	1.2~4.4	0.5~1.3	5	6,000

※DEVICE NO:

N. T. Q

FW760- [] [] []

N. 離合器馬達(普通型)
T. 直驅迷你伺服馬達

T. 直驅迷你伺服馬達
Q. 切滾條裝置 FR. 右切刀

※經銷商 AGENT



星銳縫紉機股份有限公司
SHING RAY SEWING MACHINE CO., LTD.
星銳縫紉機(嘉興)有限公司
SHING RAY SEWING MACHINE(JIAXING) CO., LTD.

※本目錄所記載的規格式樣或外觀，因加以改良，有時不預告即加以變更，請見諒。
The specifications in this catalog are subject to change without notifications.
2011.09



FW-760 SHING RAY



率先專利開發，電磁直驅式抬壓腳組，不產生雜音，反應更為靈敏。
(台字號第75856號)

電磁直驅式抬壓腳組

The patented initially-developed, electromagnetic direct-drive presser foot assembly, features not making noise, reacting more swiftly.



適用各類織帶，送料均勻、穩定。

適用範圍廣

For all kinds of ribbon Even, stable feeding.



全新設計之FR (右修刀) 切布邊功能，好操作，穩定性佳！

FR (右修刀)


The brand-new design "right hand side Fabric Cutter" teims fabric in easy and stable.



採用移動式護針器，可保護機針減少磨損，防止跳線，保持穩定美觀的針腳。

移動式護針器組

Movable needle guard protects the needle against wear, thread slipping, forms precise and beautiful stitches.

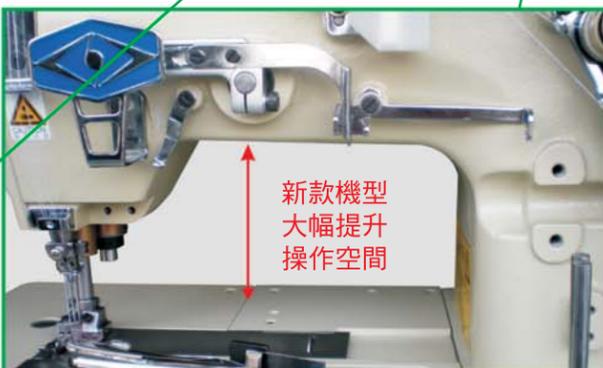

新款機型
大幅提升
操作空間

操作空間大

專利機座設計，使工作台之操縱空間大大增加。

The design of the patent holder increases largely the space of work operation



安全裝置

由於安裝了特殊的保護器，把運動部位隔開，並且安裝了護眼和護手等安全裝置，在縫製中保護操作者的安全。

Special guard away from the running parts, moreover, eye and hand safety mechanisms, protect the operator.



由於採用了按鈕式，使針腳長度的調節變得更加簡易行。

針距長度的調節

Button-typed adjusting mechanism. The adjustment of stitch length is easier.



率先專利開發，首創先河，車縫反應靈敏；克服了傳統離合器馬達和皮帶傳動之震動聲音；動力足，車縫更加滑順；停針、起縫更加精準安裝使用更加簡便。(專利產品)

直驅式迷你馬達

Lengthened lower roller stabilizes the cloth feeding, reduce the faults. It is easy for change. There won't cause different stitch lengths upon speeds.



穿底線時只需輕輕按動按鈕，底線底座便會從機器內部彈出，即可簡單的進行穿線，進一步提高操作者的工作效率。

穿線簡單易行

Just button softly when threading, threading base springs off the inside of body, the operation is done, which improves the working efficiency further. sms, protect the operator.